


Garage Cabinet Storage System

Classic Series 1.0

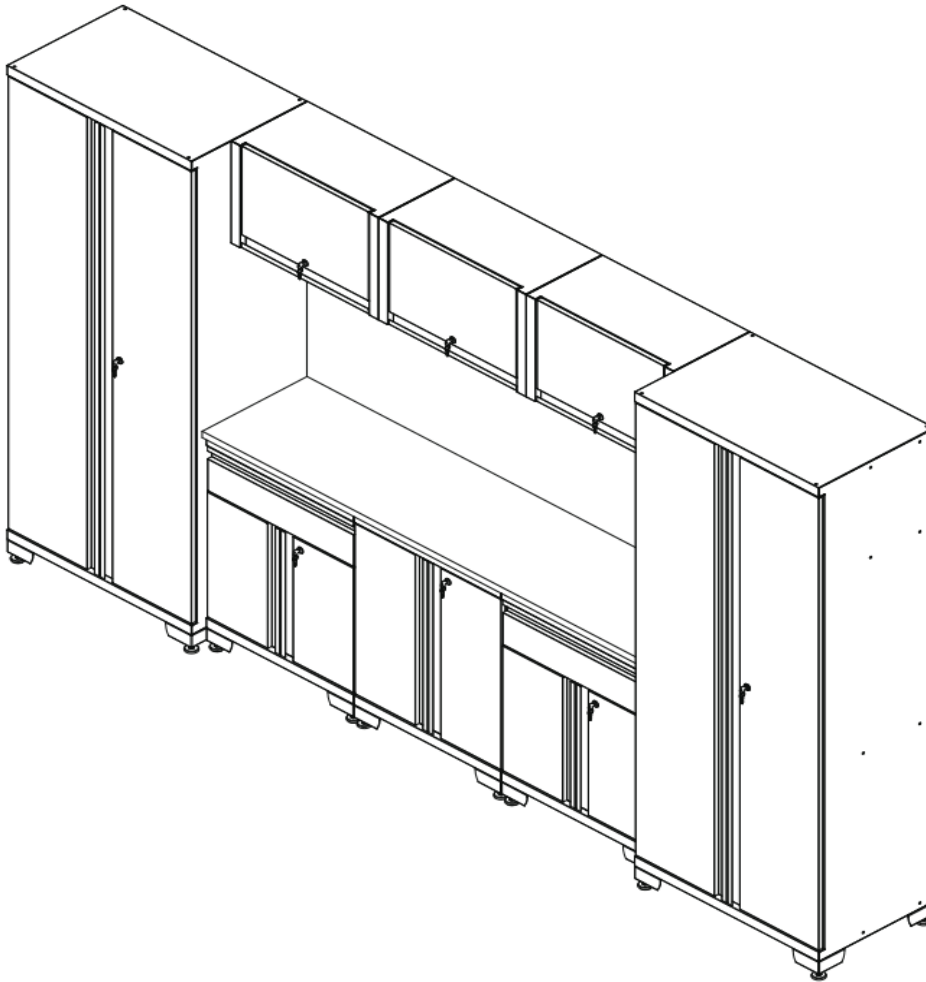

Model No.:

GZTA30232011

GZTA30232012

GZTA30231011

GZTA30231012

GZTA30242001

GZTA30242002



WARNING: Excessive Weight!

Risk of tipping if cabinets are not installed correctly. Use extreme caution, and ensure all cabinets are securely attached to the wall. Use two or more people to assemble, install and move cabinets. Never leave children unattended near cabinets.

For further information please contact GStandard Products at (408)437-6230 or by email at customerservice@gstandardproducts.com.










ATTENTION:

- Do you have a damaged OR missing part?
- For immediate service, please call (408)437-6230.
- DO NOT RETURN TO THE RETAILER.
- PLEASE RETAIN YOUR RECEIPT for your warranty.

Table of Contents

| | |
|--|----|
| Safety Guidelines..... | 3 |
| Unpacking..... | 4 |
| Hardware Supplied | 4 |
| Tools Required..... | 4 |
| Limited Lifetime Warranty | 5 |
| Products..... | 6 |
| Wall Cabinet..... | 6 |
| Locker | 6 |
| 2-Door Base Cabinet | 6 |
| 1-Drawer 2-Door Base Cabinet..... | 6 |
| Installing the Feet..... | 7 |
| Installing the Shelves | 7 |
| Installing the Worktop | 8 |
| Setup..... | 9 |
| 1. Planning the position of the cabinets | 9 |
| 2. Hanging the lockers and wall cabinets on wall | 10 |
| 3. Connecting the cabinets and lockers together..... | 10 |
| Operation | 12 |
| Maintenance | 12 |



Safety Guidelines

-  **WARNING:** Use two or more people to move, assemble and install the product to avoid any injury.
-  **WARNING:** DO NOT leave children unattended near the product.
-  **WARNING:** DO NOT stand on the product or lean on the drawers or worktop.
-  **WARNING:** WEAR SAFETY GLASSES when removing or repositioning the slides. The tools could slip, which may cause personal injury.
-  **WARNING:** DO NOT alter the product in any manner. For example, do not weld external lock bars or attach unapproved electrical equipment. This may cause product damage, personal injury or death.
-  **WARNING:** DO NOT OVERLOAD PRODUCTS!
-  **WARNING:** This product may contain one or more chemicals known to the State of California to cause cancer and birth defects or other harm.

Wash hands thoroughly after handling. Failure to heed these warnings may result in personal injury and/or property damage.

The components of the product are designed to carry the following maximum weight capacities:

| Cabinet | Shelf Weight Capacity (lb) | Drawer Weight Capacity (lb) | Bottom Weight Capacity (lb) | Top Weight Capacity (lb) | Overall Weight Capacity (lb) |
|------------------------------|----------------------------|-----------------------------|-----------------------------|--------------------------|------------------------------|
| Locker | 150 | / | 220 | 150 | 820 |
| Wall Cabinet | / | / | 100 | / | 100 |
| 2-Door Base Cabinet | 150 | / | 150 | 220 | 520 |
| 1-Drawer 2-Door Base Cabinet | 150 | 100 | 150 | 220 | 620 |

-  **CAUTION** BE CAREFUL when opening more than one drawer. The product could become unstable and tip, which may cause product damage or personal injury.
-  **CAUTION** High risk of tipping if the product is not installed correctly. Securely attach the product to the wall to avoid serious injury.

Unpacking


1. Start by placing the package on flat covered ground.
2. Remove all cardboard, honeycomb board, foam packaging material and clear plastic bags.
3. Verify all the contents are included and gather the tools required.
4. Recycle all packaging materials.

Hardware Supplied

| No. | Hardware | Locker | Wall Cabinet | 2-Door Base Cabinet | 1-Drawer Base Cabinet |
|-----|----------------------------------|--------|--------------|---------------------|-----------------------|
| 1 | M6 Hex Flange Nut | 4 | 4 | 4 | 4 |
| 2 | Flat Washer | 4 | 4 | 2 | 2 |
| 3 | Key | 2 | 2 | 2 | 2 |
| 4 | M5 x 50 Hex Tapping Bolt | 4 | 4 | 2 | 2 |
| 5 | M6 x 12 Flat-Head Bolt | 20 | 4 | 24 | 24 |
| 6 | Adjustable Leveling Feet | 4 | 0 | 4 | 4 |
| 7 | Shelf | 3 | 0 | 1 | 1 |
| 8 | Worktop Support for 10-piece set | 1 | 0 | 0 | 0 |



Tools Required

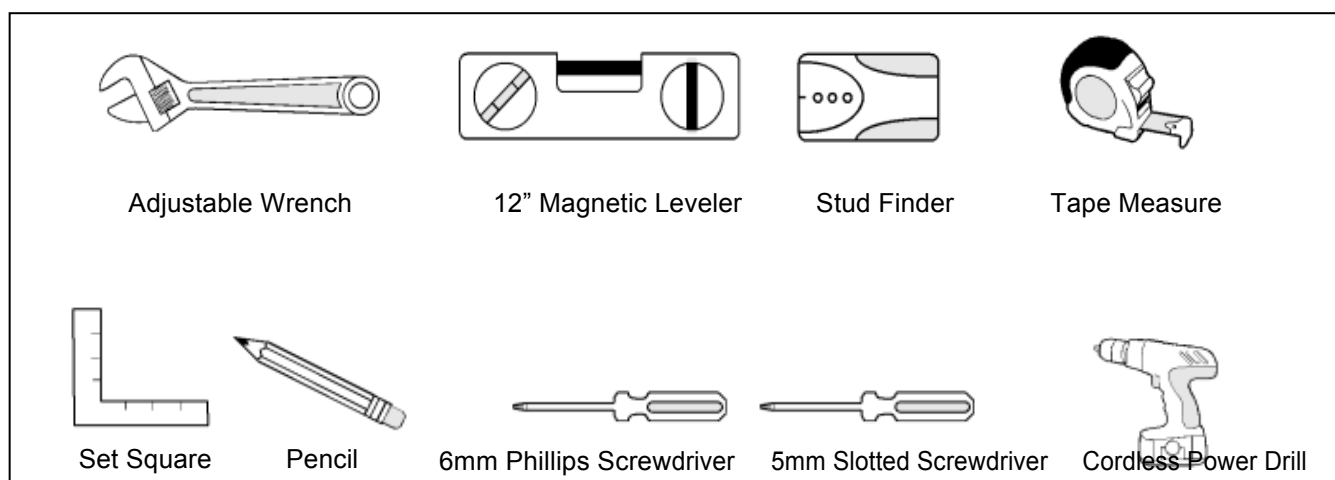




Limited Lifetime Warranty


This 24Gauge Garage Cabinets are warranted to be free from defects in materials and workmanship under normal use for the lifetime that you own the product. If any part of the product is found to be defective during normal use, the defective product or part will be replaced at our discretion. This warranty does not cover products that are damaged through accident, abuse, misuse, commercial/industrial applications or neglect. This warranty also does not cover any losses, injuries or costs including indirect, incidental or consequential damages. This warranty may not be transferred or sold. When requesting warranty service please call (408)437-6230. Have the model number, invoice and the date of purchase available when you call. If the product is defective, we will replace the defective part at no cost to you. This warranty gives you specific legal rights and you may have other rights, which may vary from state to state.

Products


1-Drawer 2-Door Base Cabinet

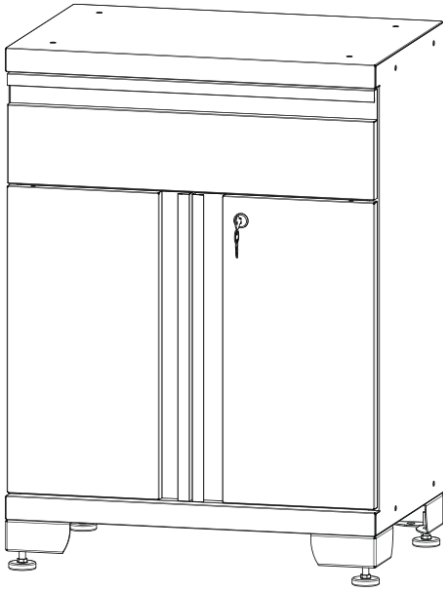


Wall Cabinet

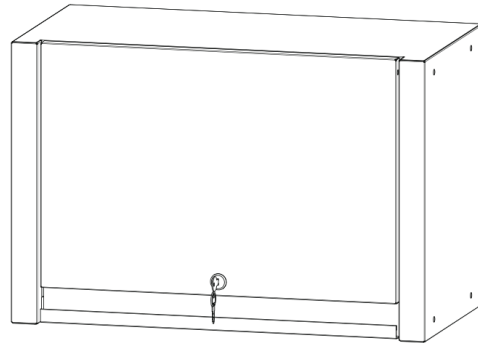

2-Door Base Cabinet

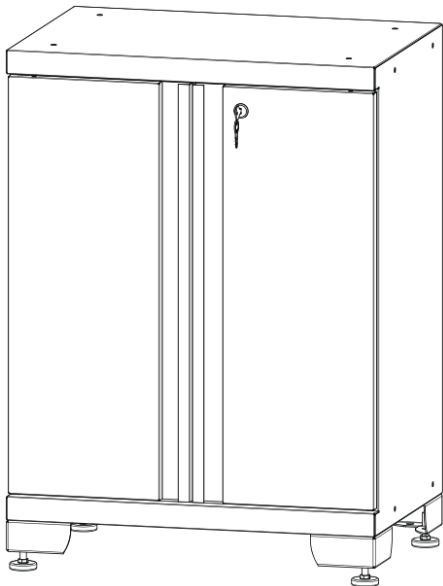


Locker

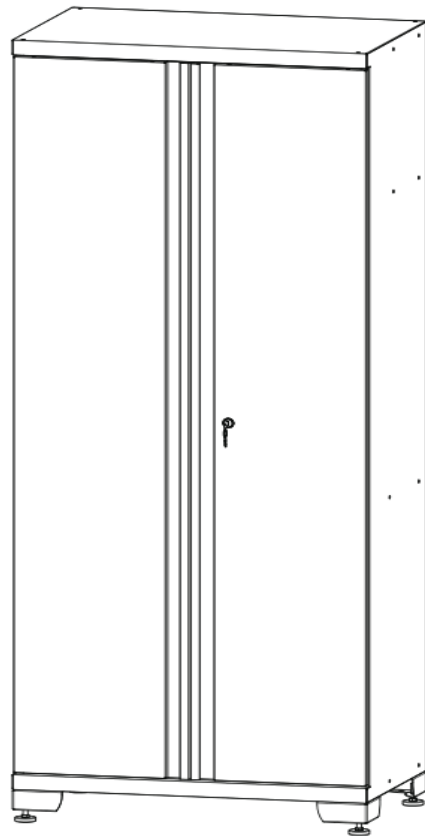

Installing the Feet


Carefully set the locker / 2-door base cabinet / 1-drawer 2-door base cabinet on its back, and then attach the adjustable leveling feet to the locker or the cabinet using sixteen **M6x12** flat-head bolts with a Philips screwdriver.

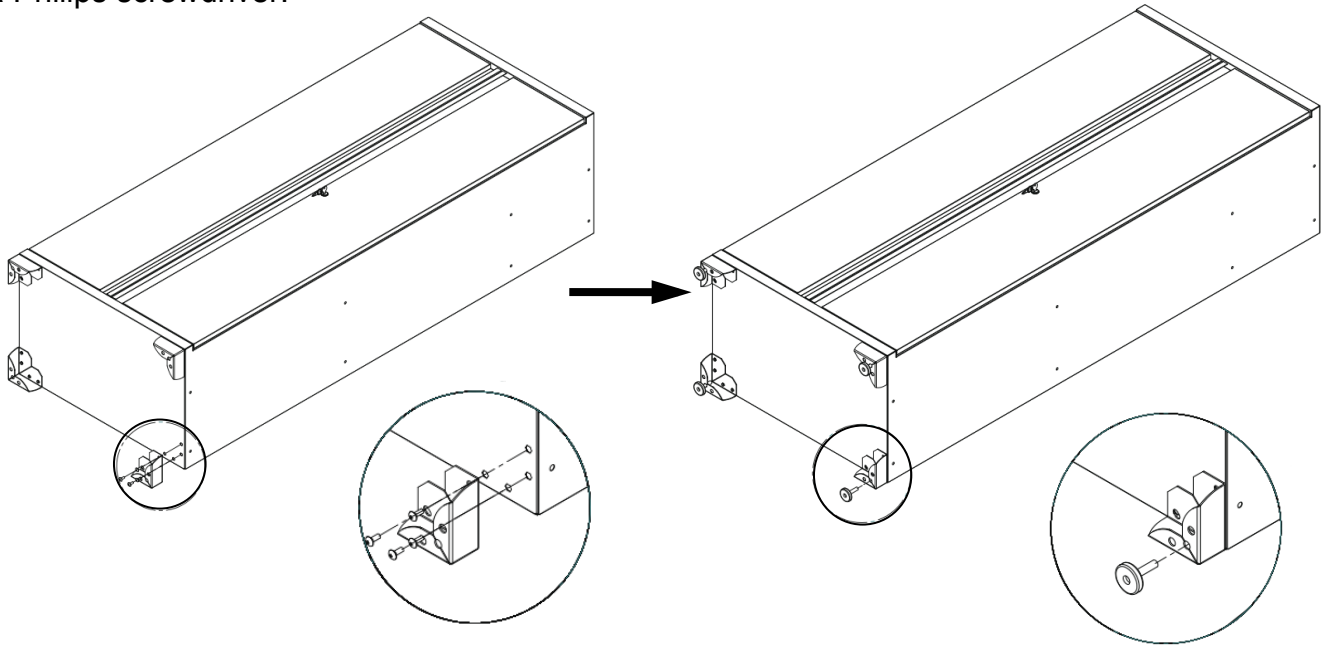

Installing the Shelves


Determine the placement of the shelves. Insert the shelf into the slots. Make sure the shelf is in the slots on the same level.

NOTE: A center shelf must be installed level with the lock on the cabinet door in order for the lock to work.

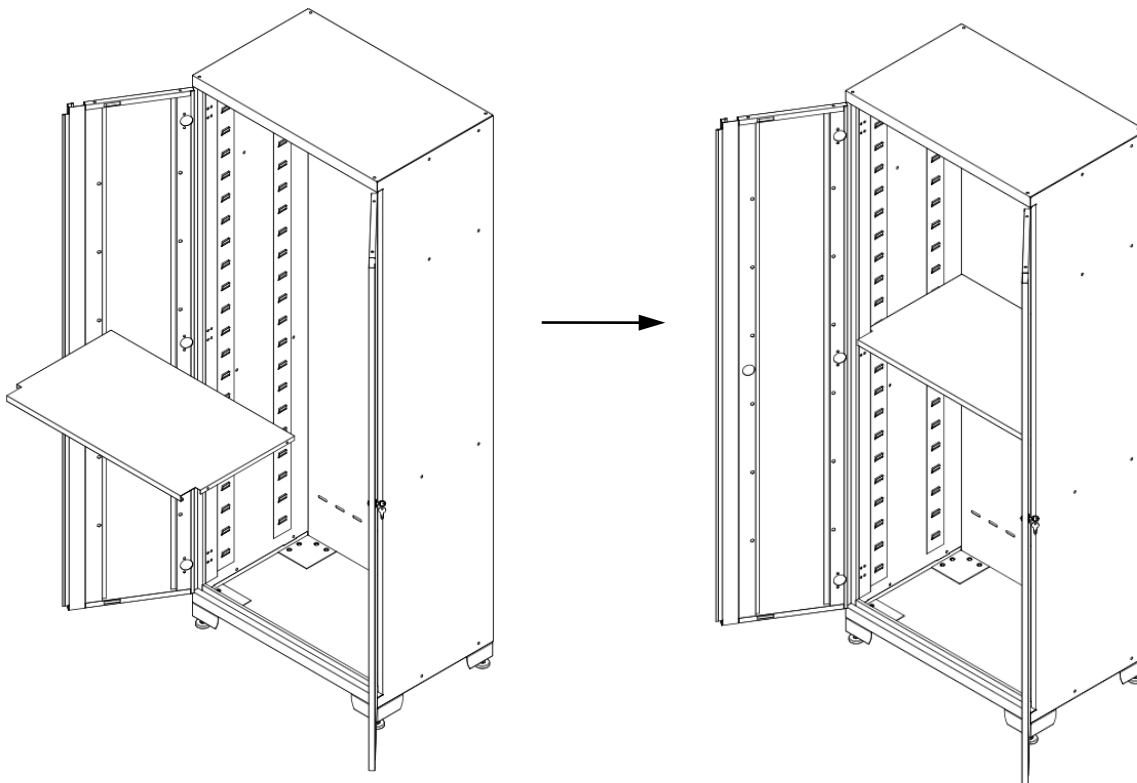


Installing the Worktop


Open the doors or remove the drawers to make sure you have enough space to install the worktop.

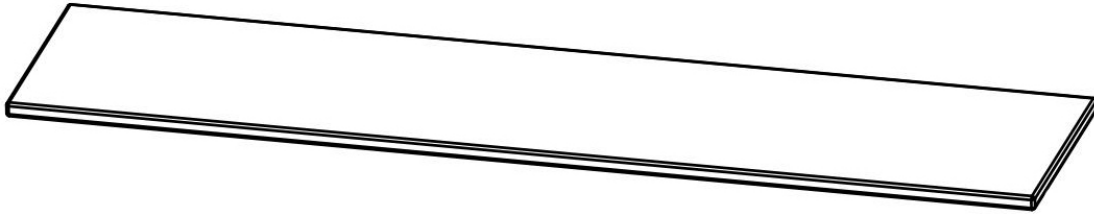

Carefully place the worktop on the cabinets and fasten it with a cordless power drill or screwdriver and four M6x12 flat-head bolts in the parts package of each base cabinet / 1-drawer 2-door base cabinet.

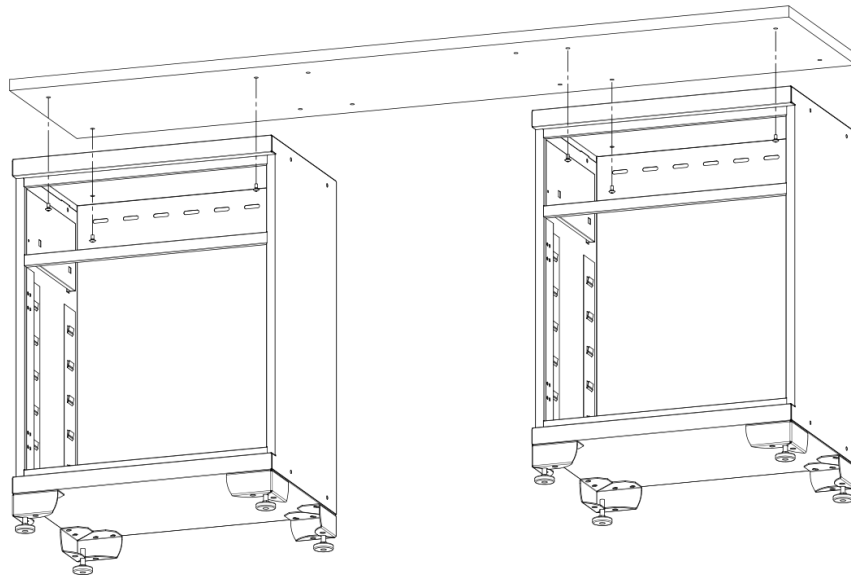


Some sets need to attach the worktop directly to the locker. Attach the support to the side of the locker with two M6x12 flat-head bolts and two M6 hex flange nuts. Level the support top with base cabinet. Attach the support top to the worktop.

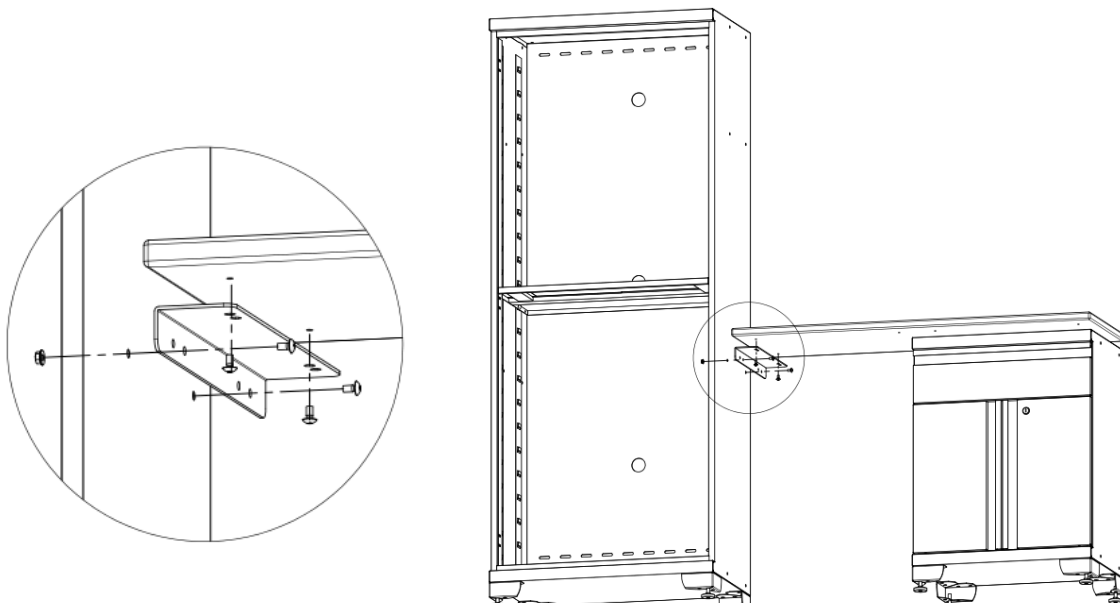

Setup

1. Planning the position of the cabinets


- A. Use a tape measure to measure and record the height and width of each cabinet.
- B. Determine how high off the ground you would like the cabinets to be (80mm -105mm) and make a horizontal mark at that position.
- C. Mark the width of each cabinet recorded in step A at the intended position, to ensure that the wall cabinets will align properly.
- D. Measure up from the line marked in step B and make a horizontal mark at each cabinet's height recorded in step A to determine where the top of the cabinets will be.
- E. Make sure the cabinets will be at a suitable height and the wall cabinets are not out of reach.

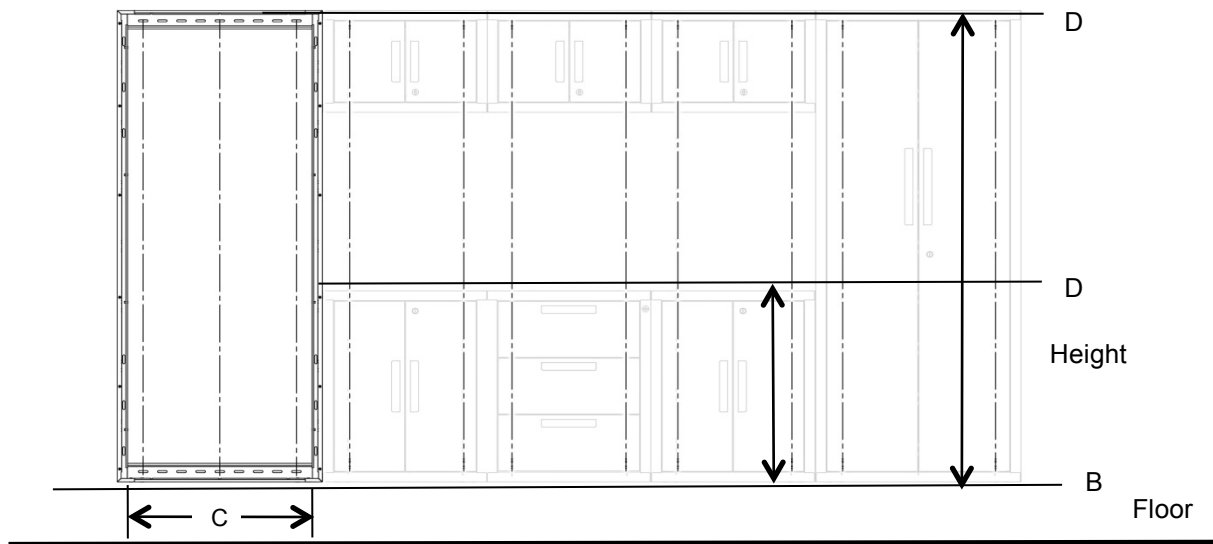

Note: Make sure there are two studs to mount the locker on, as it is easiest to start the installation with the locker first. Due to the spacing of the wall studs, some wall cabinets may have only one stud to attach to; this is acceptable if the wall cabinets are bolted together.

2. Hanging the lockers and wall cabinets on wall


Open the doors and align the top of the locker with the lines marked for the position of the top of the cabinets and securely attach the locker into the studs using four M5x50 hex tapping bolts and four flat washers.

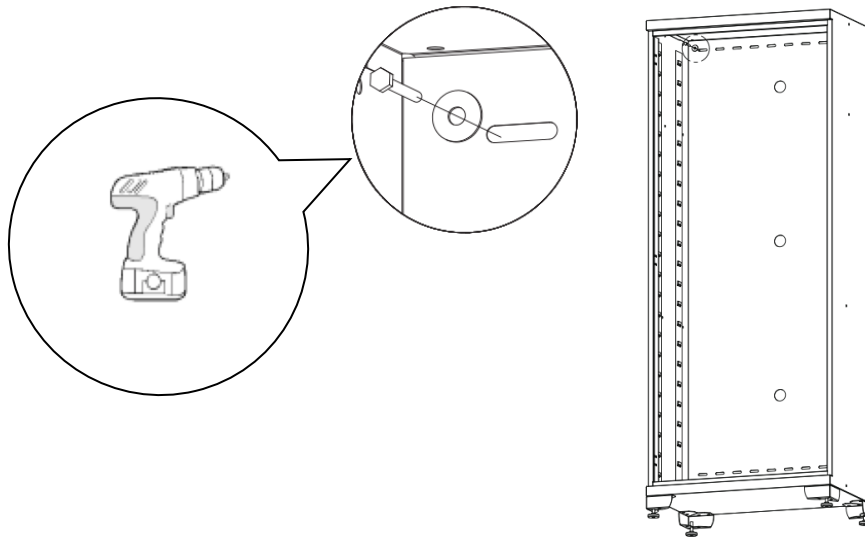

Repeat for the other locker and wall cabinets.

3. Connecting the cabinets and lockers together


For the cabinet set, open all the doors and remove the top drawer. Push the base / wall cabinet and locker together. Insert two M6x12 flat-head bolts through the two interior holes and secure them together with two M6 Hex flange nuts using a Phillips screwdriver and wrench.

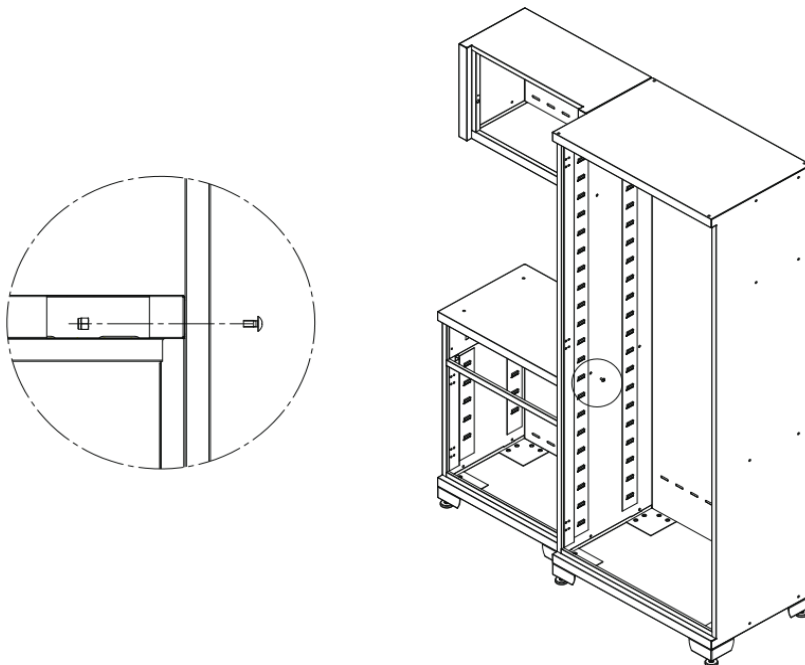


Repeat on the other locker and cabinets

Tighten all the bolts to fasten the cabinets and level the cabinets.


The installation of the garage cabinet set is finished.

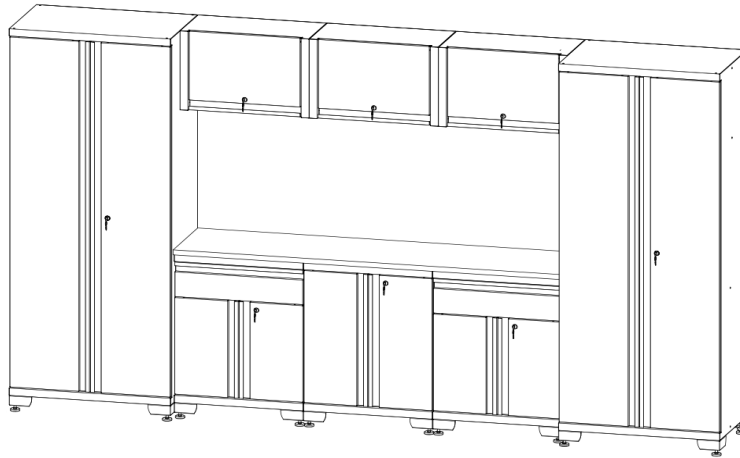

9-Piece Garage Cabinet Storage System
GZTA30232011 / GZTA30232012

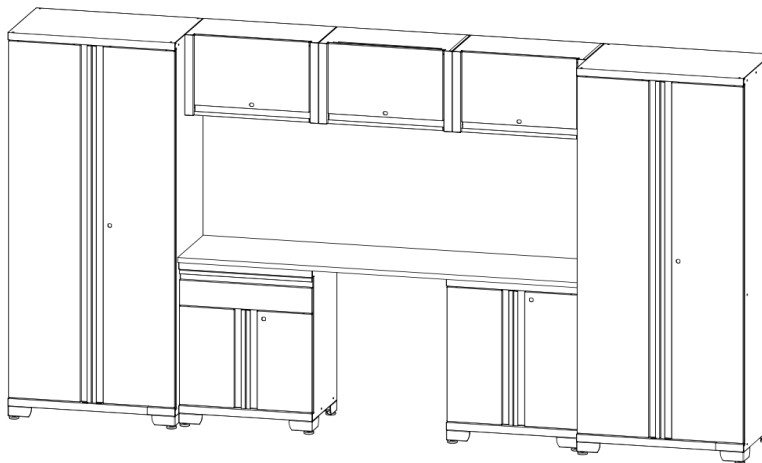

8-Piece Garage Cabinet Storage System
GZTA30231011 / GZTA30231012

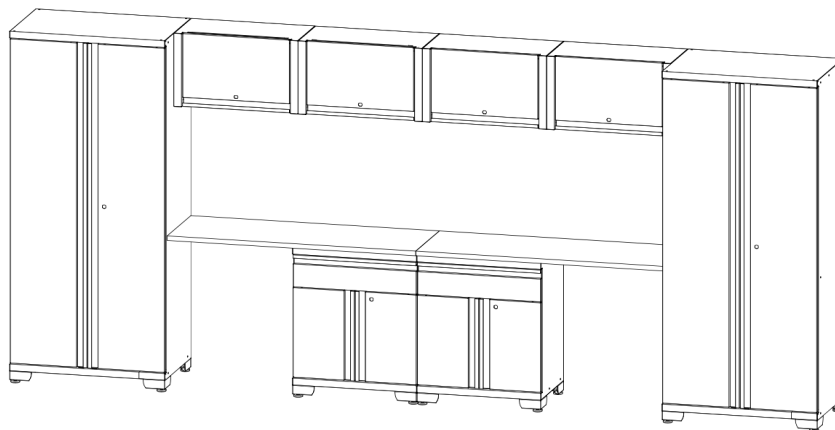


10-Piece Garage Cabinet Storage System
GZTA30242001 / GZTA30242002

Operation


Drawer Removal

Pull the drawer out so that it's almost fully extended. Push up on the black release lever on one side, while pulling down on the black release lever on the other side. While holding the levers in the positions as illustrated below, pull the drawer outward until it is released from the drawer slide.

Push up one side

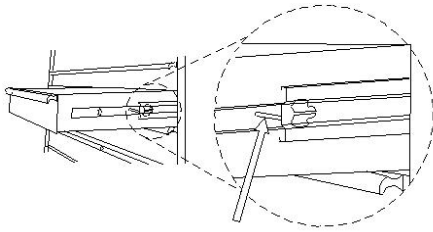

Push down the other side

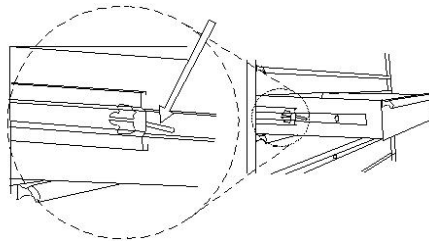

Drawer Replacement

Extend the drawer slides from the cabinet. Carefully insert the brackets on each side of the drawer into the slots in the slides and position them properly. Once inserted, close the drawer completely to set the slides in their proper positions.

Maintenance

1. Lubricate the slides twice a year with a quality lubricant. This is especially necessary when the temperature drops, which may cause the bearings to be stiff.
2. Periodically clean the drawer fronts, doors, handles and other surfaces with mild detergent and water.
3. For safety, use a non-flammable cleaning fluid. Grease and oil can be removed with most standard cleaning fluids.